

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) Publication number : **0 428 099 B1**

Latte Micropatentista.
\$4.95

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication of patent specification :
15.11.95 Bulletin 95/46

(51) Int. Cl.⁶ : **H04B 7/005**

(21) Application number : **90121618.4**

(22) Date of filing : **12.11.90**

(54) **A digital radio link system and a method of adjusting the transmission power in a digital radio link system.**

(30) Priority : **14.11.89 FI 895419**

(43) Date of publication of application :
22.05.91 Bulletin 91/21

(46) Publication of the grant of the patent :
15.11.95 Bulletin 95/46

(84) Designated Contracting States :
CH DE ES FR GB IT LI SE

(66) References cited :
EP-A- 0 217 042
EP-A- 0 330 166
US-A- 4 777 653

(73) Proprietor : **NOKIA TELECOMMUNICATIONS OY**
Mäkkylä Puistotie 1
FIN-02600 Espoo (FI)

(72) Inventor : **Henriksson, Jukka**
Leilankuja 4 B 18
SF-02230 Espoo (FI)

(74) Representative : **Howden, Christopher Andrew et al**
FORRESTER & BOEHMERT
Franz-Joseph-Strasse 38
D-80801 München (DE)

EP 0 428 099 B1

Note : Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).

Description

The invention relates to a method of adjusting the transmission power in a digital radio link system by monitoring the received signal level and the error rate estimate at the receiving end.

On determining the transmission power of a digital radio link system, not only the so-called constant power dissipations caused by the link span but also random signal fades caused by multi-path propagation, for instance, have to be taken into account. Therefore the transmission power of the transmitter is often adjusted to a value considerably above the minimum transmission power which in normal conditions would suffice for interference-free reception at the other end of the link span. Excessive transmission power provides the link span with a power margin which ensures interference-free reception even in difficult conditions. On the other hand, however, high transmission power increases interference in adjacent channels or systems. This hampers the realization of dense radio link networks, efficient utilization of frequency bands and the reuse of the same frequency within the same area.

U.S. Patent 4,004,224 discloses a method in which transmission power within a certain link span is increased automatically if fading is observed within this specific span, so that a constant reception power is maintained at the receiver. The receiver produces a signal representing the level of the received signal, and this signal is sent through a return channel to the transmitter for the adjustment of the transmission power.

In U.S. Patent 4,309,771, the bit error rate of the received signal is monitored in place of the received signal level, and the transmission power is adjusted through the return channel in such a way that the bit error rate of the received signal does not exceed a predetermined threshold value.

In FR Patent Specification 85 18919 (= FR-A-2 592 256 = US-A-4 777 653) the range of adjustment is, in principle, divided into two portions. At low reception levels the transmitter is instructed through the return channel to increase power to compensate for fading. At high levels the error rate too is monitored. If the error rate is high irrespective of the sufficient level, the transmission power is increased temporarily so that it exceeds the normal backoff of 6 dB (such as a backoff of 3 dB).

EP-A-0330166 discloses a method of regulating transmission power of a radio transmission which uses a combination of a receiver level evaluation and quality evaluation via the phase jitter of the signal received as the regulating criterion for the transmission power of the opposite station.

EP-A-0217042 discloses a transmission system for electromagnetic waves consisting of a transmitter and a receiver with respective antennae, the receiver

having an associated diversity receiver. The receiver has a fade detector for the rapid detection of the causes of fading, switching thresholds being derived from the signals from the fade detector and used for switching the diversity receiver on and off, for reducing or increasing the transmission power.

The above-described methods aim at adjusting the transmission power so as to decrease the transmission power required in normal conditions in order to decrease the interference caused in other link spans or channels while enabling sufficient quality of data transmission even during the fading periods. These methods, however, are not sufficiently effective in all situations.

The object of the present invention is to provide an improved method of adjusting the transmission power of a digital radio link.

According to one aspect of the invention there is provided a method of adjusting the transmission power in a digital radio link system having a transmitting end and a receiving end, comprising the steps

transmitting a digital signal from a transmitting end of the link system at a normal transmission power value less than a maximum transmission power value,

receiving said digital signal at a receiving end of the link system, said received digital signal having at times errors and signal level changes,

detecting and monitoring the received signal level and the error rate estimate at the receiving end, adjusting the transmission power value at the transmitting end in accordance with the detected signal level and error rate estimate characterised by the further steps of

monitoring the rate of change of the received signal level,

temporarily increasing the transmission power value at the transmitting end to a first value between the normal transmission power value and the maximum transmission power value at times when either the error rate estimate or the rate of change of the received signal level in the alternative exceeds a respective predetermined threshold value.

According to another aspect of the invention, there is provided a digital radio link system, comprising at a receiving end a first means for monitoring the error rate estimate and for producing a first control signal if the error rate estimate exceeds a predetermined threshold value, and at a transmitting end means for adjusting the transmission power, said adjusting means being responsive to the occurrence of the first control signal for increasing the transmission power, characterised in that there is further provided a second means for monitoring the rate of change of the received signal level and for producing a second control signal if the rate of change exceeds a predetermined threshold value, and that said means for adjusting the transmission power being responsive to

*monitor -
estimate*

the occurrence of the first or the second control signal by increasing the transmission power temporarily to a first value between a normal transmission power and the maximum transmission power.

By monitoring the rate of change of the received signal level, rapid fades occurring in multi-path propagation can be detected efficiently. With multi-path propagation, fading may be very rapid (as rapid as 100 dB/s and more), so that changes in the level of reception can be difficult to compensate for by real-time adjustment of the transmission power through the return channel due to, for instance, the delay of the return channel. In the method of the invention the transmission power is therefore set to its highest normal value for some time when rapid fading is detected. This makes it easier to control rapidly changing situations and stabilizes the adjustment. In addition, it is possible during multi-path fading that the received signal level is sufficient but errors occur in the reception due to interaction between channels. In the preferred embodiment of the method of the invention the transmission power is therefore increased from a value close to the maximum transmission power to the maximum transmission power if the error rate estimate exceeds the predetermined threshold value in addition to the detected multi-path condition. This degrades the signal to some extent, whereby the long-term error rate can be of the order of $1E-7 \dots 1E-8$. In a multi-path condition, it is, however, necessary to bring the error rates $1E-3 \dots 1E-6$ under control, whereby the use of the maximum transmission power for a limited period of time is advisable.

If the monitored error rate estimate exceeds the predetermined threshold value in normal conditions (no multi-path condition), the transmission power is increased temporarily close to the maximum transmission power. In this way rapid response to errors is achieved. This kind of situation may occur due to temporary propagation conditions, whereby some remote system may disturb for some time.

In the preferred embodiment of the invention, slow variation in the level of reception, which may be due to variation in the k value, for instance, is compensated for by monitoring the level of reception. If the level of reception falls below a predetermined minimum, the transmission power is adjusted through the return channel by increasing it by a small increment. In this way the quality of the received signal remains sufficiently good while avoiding use of excessive transmission power and adjacent system interference.

By means of the method of the present invention, the transmission power can be adjusted in such a way that it is maintained at an optimal value in normal conditions while providing rapid response to interferences, thus ensuring interference-free reception.

The invention is also concerned with a digital radio link system according to claim 8 for applying the

method of the invention.

The invention will now be described by means of exemplifying embodiments with reference to the attached drawings, wherein

Figure 1 shows a block diagram of a digital radio link system according to the invention;

Figure 2 shows a flow chart of the transmission power adjustment unit 4 of Figure 1;

Figure 3 shows the circuit diagram of the transmission power adjustment unit 4 of Figure 1; and Figure 4 illustrates graphically the adjustment of transmission power according to the invention in an imaginary reception situation.

Figure 1 shows a radio link system according to the invention, comprising a transmitter unit 1 and a receiver unit 2. In the transmitter unit 1, a transmitter or modulator part 6 applies a modulated high-frequency signal to a high-frequency amplifier stage 7, such as an output stage, which amplifies the signal and applies it to a transmitter antenna 3. At the other end of a link span 15, a receiver antenna 12 receives the signal sent by the transmitter unit 1 and applies it to a receiver 8, in which the signal is detected.

A block 9 in the receiver unit 2 monitors the rate of change of the received signal level, particularly rapid level drops, to detect a multi-path condition, and produces a 1-bit signal S_{mp} the state of which is 1, if a multi-path condition occurs, and 0 if no multi-path condition is present. In the case of Figure 1 the block 9 compares the present value of the AGC voltage P_{reo} of the receiver 8 with a shortterm average of the voltage or merely with a preceding value. If the present value of the AGC voltage P_{reo} deviates at least to a predetermined extent from the short-term average or the preceding value, the change is interpreted to have been caused by a rapid fade, and the state of the output signal S_{mp} of the block 9 is given the value 1.

A block 10 in the receiver unit monitors the received signal level, and produces a 1-bit signal S_{min} , if the received signal level is below a predetermined threshold value L_{min} . In the preferred embodiment, the block 10 also monitors the value of the AGC voltage P_{reo} of the receiver 8. The threshold value L_{min} is set so that the residual error rate of the system will be sufficiently good. The limit value L_{min} is preferably of the order of about 10 to 12 dB above the threshold level of the receiver 8.

A block 11 in the receiver unit produces a 1-bit signal S_{err} the state of which is 1 if an error condition occurs at the reception and 0 if no error condition occurs. The error condition may be, for instance, N errors per time unit (e.g. per one minute). In the preferred embodiment of the invention the signal S_{err} obtains the state 1 immediately after N errors have occurred even though the time would not have run out. The errors can be counted, e.g., from the parity of the frame. The error signal can also be produced from the pseudo-error signal occurring in connection with the

receiver 8. When the estimated error rate is greater than a predetermined threshold value, the state of the signal S_{err} is given the value 1.

The binary signals generated by the blocks 9, 10 and 11 are multiplexed by a multiplexer 13 and sent through a low-capacity return control channel 14 to the transmitter unit 1. In the transmitter unit 1 a demultiplexer 5 demultiplexes the received signal and applies the signals S_{mp} , S_{min} and S_{err} to the transmission power adjustment block 6. The transmission power adjustment block generates, on the basis of these signals, an adjusting voltage $c(t)$ which controls the amplifier stage 7 of the transmitter unit 1. By means of the adjusting voltage $c(t)$ a high-frequency power P_{out} applied by the amplifier stage 7 to the antenna 3 can be adjusted in response to the quality of the signal received by the receiver unit 2.

The functions of the transmission power adjustment unit 4 are illustrated by the operational diagram of Figure 2.

To begin with, the presence of a multi-path condition is monitored by detecting the state of the signal S_{mp} representing an excessive rate of change of the signal level. If a multi-path condition is detected ($S_{mp} = 1$), the state of the signal S_{err} representing an error condition is monitored at point 22 to find out whether an error condition is present. If $S_{err} = 1$, a multi-path condition and error condition are simultaneously present, as a result of which a maximum transmission power P_{max} is set at point 23, and the transmission is continued at this value for a period of time $T1$ from the last detection of simultaneous multi-path and error condition. With a 16QAM signal, the maximum transmission power may be, e.g., 2 to 4 dB and with a 4QAM signal about 0 to 2 dB below the level of a 1 dB compression point. The time period $T1$ may be of the order of 5 to 10 minutes, for instance. This use of maximum transmission power aims at minimizing the time during which the error rate at the reception is inferior to 10^{-3} ... 10^{-6} .

If point 22 gives as a result $S_{err} = 0$ (no error condition), the transmission power is set to a value P_1 at point 25, which is slightly below the maximum transmission power, and with a 16QAM signal, for instance, about 6 to 8 dB below the compression level of 1 dB. With the transmission power P_1 , distortions are small and it is thus possible to achieve a good residual error rate (BER). The transmission is continued at the power P_1 for a time period $T2$ from the last detection of multi-path condition. The time period $T2$ is of the order of 15 to 20 min, for instance.

If point 21 gives as a result $S_{mp} = 0$, that is, there is no multi-path condition present, the possible presence of an error condition is checked at point 24 by means of the signal S_{err} . If $S_{err} = 1$ at point 24, one goes to point 25, at which the transmission power is set to the above-mentioned value P_1 for the time period $T2$. Errors occurring without multi-path condition

may be due to interference caused by exceptional propagation conditions. In such a case the situation may continue for a long period of time and it is not advisable to send the maximum transmission power P_{max} .

If point 24 gives as a result $S_{err} = 0$, the received signal level is monitored at point 26 by means of the signal S_{min} . If $S_{min} = 1$, that is, the received signal level is below a minimum reception level L , the preceding value P_{n-1} of the transmission power is increased by an increment $k \cdot d$, where k is a proportional coefficient (≥ 1 , typically between 2 and 4) and d is a basic increase. After the increase, the maximum value of the transmission power should not exceed the above-mentioned power P_1 . By selecting $k > 1$, the increase in the transmission power is more rapid than its decrease.

If point 26 gives as a result $S_{min} = 0$, that is, the level of reception is above the minimum reception level L , the transmission power is decreased from the preceding value P_{n-1} by the increment d . These changes are typically below 1 dB, because the updating is carried out, for instance, once a minute or more frequently. The rate of change of the transmission power should be less than 1 dB/s in order to prevent the interpretation of the change as a multi-path condition at the receiving end. The transmission power will not fall below a predetermined value P_0 which is the transmission power in normal conditions. The link span is so dimensioned that the transmission power P_0 in normal conditions results in a reception level which is above the minimum reception level L . Accordingly, the transmission power is nearly constantly P_0 , and the system operates about 12 to 14 dB above the threshold level of the receiver. Higher power levels are applied only exceptionally, that is, in case of multi-path and error condition.

Figure 3 shows diagrammatically the principles of one possible realization of the unit 4 for adjusting the transmission power.

The signals S_{mp} and S_{err} are applied to an AND gate 41 the output of which is connected to a flip-flop 42. If both signals S_{mp} and S_{err} have the state 1, the gate 41 and the flip-flop 42 reset and start a counter 43 which counts the time period $T1$. The output of the flip-flop 42 causes an output LOAD1 in another flip-flop 44 to have the state 1 during the counting. When the counting of the counter 43 is completed after the time period $T1$, the counter 43 sets the output LOAD1 of the flip-flop 44 to the state 0. The signal LOAD1 controls a memory circuit 45. During each cycle of a clock signal CL, a count corresponding to the maximum power P_{max} is loaded from the memory circuit 45 to a counter 55 as long as the signal LOAD1 has the state 1.

The signals S_{mp} and S_{err} are also applied to an exclusive-OR gate 46 which controls, through a flip-flop 47, a counter 48 counting the time period $T2$. The

counter 48 is reset and started whenever any of the signals S_{mp} and S_{err} has the state 1, that is, when either a multi-path or error condition is present. An output signal from a flip-flop 49 is set to the state 1 during the counting of the counter 48 and it is applied to one input in an AND gate 50. The signal LOAD1 is applied to another input, that is, an inverting input, in the AND gate, whereby the output signal LOAD2 of the gate 50 has the state 1 only if the signal LOAD1 has the state 0 and the output signal of the flip-flop 49 has the state 1. A count corresponding to the transmission power P_1 is applied from a memory circuit 51 to the counter 55 during each cycle of the clock signal CL as long as the signal LOAD2 has the state 1. The gate 50 ensures that the maximum power P_{max} is loaded in the first place in case of competition between P_{max} and P_1 .

The signal S_{min} is applied directly to AND gates 53, 54 and the signals LOAD1 and LOAD2 through a NOR gate 52. In this way, the adjustment of the transmission power takes place by means of the signal S_{min} only if neither multi-path condition nor error condition is present, whereby the signals LOAD1 and LOAD2 both have the state 0 and the output of the gate 52 has the state 1. The signal S_{min} is thereby able to affect the counter 55 through the gates 53 and 54. If the signal $S_{min} = 1$, i.e., the received level is below the minimum reception level L, an increase $k \cdot d$ is applied to the input of the counter 55. If the signal $S_{min} = 0$, i.e., the minimum reception level is exceeded, the increment d is extracted from the contents of the counter 55 through an input D. The counter 55 controls internally that the transmission power adjusted therethrough does not exceed the power P_1 or is not below the power P_0 .

The above-described operation can, of course, also be realized as a microprocessor programme.

The digital output of the counter 55 is applied to a D/A converter 56 which produces an analog voltage. If required, this voltage can be subjected to a nonlinear conversion in the block 57 if it is desired that the power increment steps on the dB scale should be substantially of the same size. As a result, an adjusting voltage $c(t)$ is achieved, by means of which one amplifier in the amplifier sequence of the transmitter is adjusted, such as the high-frequency terminal amplifier.

The counting block 6 described above can be realized in a simpler form. One alternative is to apply the same time period T1 for sending both the maximum power P_{max} and the power P_1 . Thereby one circuit suffices for the counting of time. In the microprocessor implementation, it might be possible to save a few program steps in this way.

Another alternative, probably applicable with constant-amplitude modulation methods, is to use a single higher power value P_1 in place of the powers P_1 and P_{max} and correspondingly a single time period T2. This simplifies the realization considerably.

The adjusting principle could also be modified by monitoring possible exceeding of a predetermined maximum reception level U. If the received level is between L and U, there is no need to change the power level. If the level U is exceeded, the transmission power is decreased. An advantage of this alternative would be the less frequent changes in transmission power and more reliable detection of multi-path condition. A drawback is the need of an additional bit to transfer information to the transmitter.

Figure 4 illustrates the operation of the adjusting method of the invention in an imaginary reception situation. At point A the received signal level is below the predetermined minimum reception level L, whereby the transmitter is adjusted to some extent (an increment $k \cdot d$ is added to the counter 55) to increase the power. At point B it is to be seen that the reception level exceeds the minimum reception level L and the increment d is extracted from the counter 55. The same takes place during the following clock cycle at point C.

At point D, a rapid change in the received signal level as compared with the short-term average is detected, such as a difference of 3 to 5 dB or a rate of change which is greater than 3 to 5 dB/s. The power P_1 close to the maximum power is thereby adjusted in the transmitter. At point E both multi-path and error condition are detected, and the maximum transmission power P_{max} is connected to the transmitter for the time period T1. No further errors are detected, but the multi-path condition continues. At point F, the transmission power is decreased from the maximum power P_{max} to the value P_1 after the time period T1 has elapsed from the last detection E of errors. At point G the time period T2 has elapsed from the last detection of multi-path condition, whereby the transmission at the power P_1 is interrupted and the adjustment is begun to be carried out with the signal S_{min} . It is thereby observed at point G that the minimum reception level L is exceeded and the output power P_{out} is decreased by the increment d. The same takes place at point H within the following clock cycle and the transmission power falls gradually until the normal transmission power P_0 is achieved at point I.

At point K, an error condition occurs without the multi-path fading. The transmission power is thereby increased to the value P_1 . The power is transmitted for the time period T2 after the last detection of an error condition. At point L the adjustment again takes place with the signal S_{min} which decreases the transmission power gradually or monotonously toward the value P_0 .

The attached figures and the description related to them are only intended to illustrate the present invention. In their details the method and the system of the invention may vary within the scope of the attached claims.

Claims

1. A method of adjusting the transmission power in a digital radio link system having a transmitting end and a receiving end, comprising the steps
 - transmitting a digital signal from a transmitting end of the link system at a normal transmission power value less than a maximum transmission power value,
 - receiving said digital signal at a receiving end of the link system, said received digital signal having at times errors and signal level changes;
 - detecting and monitoring the received signal level and the error rate estimate at the receiving end,
 - adjusting the transmission power value at the transmitting end in accordance with the detected signal level and error rate estimate characterized by the further steps of
 - monitoring the rate of change of the received signal level,
 - temporarily increasing the transmission power value at the transmitting end to a first value between the normal transmission power value and the maximum transmission power value at times when either the error rate estimate or the rate of change of the received signal level in the alternative exceeds a respective predetermined threshold value.
2. A method according to claim 1, characterized in that the transmission power is increased temporarily to the maximum transmission power if both the error rate estimate and the rate of change of the signal level simultaneously exceed the respective predetermined threshold value.
3. A method according to claim 1 or 2, characterized in that the transmission power is restored from the first value to the normal value after a predetermined period of time after the last detection of an error rate estimate or a rate of change of the received signal level which exceeds the respective threshold value.
4. A method according to claim 3, characterized in that the transmission power is restored to the normal value as a function either in discrete steps or continuously.
5. A method according to any of the preceding claims, characterized in that the transmission power is increased with a predetermined increment if the rate of change of the received signal level and the error rate estimate do not exceed the respective predetermined threshold values but the received signal level is below a predetermined threshold level.
6. A method according any of the preceding claims, characterized in that the transmission power is decreased by predetermined increment if the error rate estimate and the rate of change of the signal level do not exceed the respective predetermined threshold value and the received signal level is not below a predetermined threshold value.
7. A method according to any of the preceding claims, characterized in that the rate of change of the received signal level is monitored by comparing each particular signal level with a short-term average of the received signal level or one or more of the preceding discrete measured signal levels.
8. A digital radio link system, comprising at a receiving end (2) a first means (11) for monitoring the error rate estimate and for producing a first control signal (S_{err}) if the error rate estimate exceeds a predetermined threshold value, and at a transmitting end (1) means (4) for adjusting the transmission power, said adjusting means being responsive to the occurrence of the first control signal (S_{err}) for increasing the transmission power, characterized in that there is further provided a second means (9) for monitoring the rate of change of the received signal level and for producing a second control signal (S_{mp}) if the rate of change exceeds a predetermined threshold value, and that said means (4) for adjusting the transmission power being responsive to the occurrence of the first (S_{err}) or the second (S_{mp}) control signal by increasing the transmission power temporarily to a first value between a normal transmission power and the maximum transmission power.
9. A system according to claim 8, characterized in that said means (4) for adjusting the transmission power is responsive to the simultaneous occurrence of the first (S_{err}) or the second (S_{mp}) control signal for increasing the transmission power to the maximum transmission power.
10. A system according to claim 8 or 9, characterized in that there is further provided at the receiving end a third means (10) for monitoring the received signal level and for producing a third control signal (S_{min}) if the received signal level is below a predetermined threshold value, and that said means (4) for adjusting the transmission power is responsive in the absence of the first (S_{err}) and the second (S_{mp}) control signal, to the occurrence of the third control signal (S_{min}) by increasing the transmission power by a small increment.

11. A system according to claim 10, **characterized** in that said means (4) for adjusting the transmission power is responsive to the absence of the first, second and third control signal for decreasing the transmission power by a predetermined increment.

Patentansprüche

1. Verfahren zum Einstellen der Sendeleistung in einem digitalen Funkverbindingssystem, das eine Sendeseite und eine Empfangsseite aufweist, wobei das Verfahren die folgenden Schritte umfaßt

- Senden eines digitalen Signals von einer Sendeseite des Verbindungssystems mit einem normalen Sendeleistungswert, der geringer als ein maximaler Sendeleistungswert ist,
- Empfangen des digitalen Signals an einer Empfangsseite des Verbindungssystems, wobei das empfangene digitale Signal zeitweise Fehler und Signalpegelschwankungen aufweist;
- Messen und Anzeigen des empfangenen Signalpegels und der geschätzten Fehlerrate auf der Empfangsseite,
- Einstellen des Sendeleistungswertes auf der Sendeseite im Einklang mit dem gemessenen Signalpegel und der geschätzten Fehlerrate,

dadurch gekennzeichnet, daß

es weiter die folgenden Schritte umfaßt:

- Anzeigen der Schwankungs- bzw. Änderungsrate des empfangenen Signalpegels,
- zeitweises Anheben der Sendeleistungswertes auf der Sendeseite auf einen ersten Wert zwischen dem normalen Sendeleistungswert und dem maximalen Sendeleistungswert zu Zeiten, wenn entweder die geschätzte Fehlerrate oder die Schwankungs- bzw. Änderungsrate des empfangenen Signalpegels alternativ einen jeweils vorbestimmten Schwellenwert überschreiten.

2. Verfahren nach Anspruch 1, **dadurch gekennzeichnet, daß** die Sendeleistung zeitweise auf die maximale Sendeleistung angehoben wird, wenn sowohl die geschätzte Fehlerrate als auch die Schwankungs- bzw. Änderungsrate des Signalpegels gleichzeitig den jeweils vorbestimmten Schwellenwert überschreiten.
3. Verfahren nach Anspruch 1 oder 2, **dadurch gekennzeichnet, daß** die Sendeleistung von dem ersten Wert auf den

normalen Wert nach einer vorbestimmten Zeitspanne nach der letzten Messung einer geschätzten Fehlerrate oder einer Schwankungs- bzw. Änderungsrate des Empfangssignalpegels, welche den jeweils vorbestimmten Schwellenwerte überschreitet, zurückgesetzt wird.

4. Verfahren nach Anspruch 3, **dadurch gekennzeichnet, daß** die Sendeleistung einer Funktion folgend entweder in diskreten Schritten oder kontinuierlich auf den normalen Wert zurückgesetzt wird.

5. Verfahren nach einem der vorhergehenden Ansprüche, **dadurch gekennzeichnet, daß** die Sendeleistung um eine vorbestimmte Schrittweite erhöht wird, wenn die Schwankungs- bzw. Änderungsrate des Empfangssignalpegels und die geschätzte Fehlerrate die jeweiligen vorbestimmten Schwellenwerte nicht überschreiten, aber der Empfangssignalpegel unter einem vorbestimmten Schwellenpegel liegt.

6. Verfahren nach einem der vorhergehenden Ansprüche, **dadurch gekennzeichnet, daß** die Sendeleistung um eine vorbestimmte Schrittweite vermindert wird, wenn die geschätzte Fehlerrate und die Schwankungs- bzw. Änderungsrate des Signalpegels den jeweils vorbestimmten Schwellenwert nicht überschreiten und der Empfangssignalpegel nicht unterhalb des vorbestimmten Schwellenwertes liegt.

7. Verfahren nach wenigstens einem der vorhergehenden Ansprüche, **dadurch gekennzeichnet, daß** die Schwankungs- bzw. Änderungsrate des Empfangssignalpegels dadurch angezeigt wird durch Vergleich jedes einzelnen Signalpegels mit einem Kurzzeitmittel des Empfangssignalpegels oder mit einem oder mehreren vorhergehenden diskret gemessenen Signalpegeln.

8. Digitales Funkverbindingssystem, welches an der Empfangsseite (2) eine erste Einrichtung (11) zum Anzeigen der geschätzten Fehlerrate und zum Erzeugen eines ersten Steuersignals (S_{err}) aufweist, wenn die geschätzte Fehlerrate einen vorbestimmten Schwellenwert überschreitet, und weiter an einer Sendeseite (1) eine Einrichtung (4) zum Einstellen der Sendeleistung aufweist, wobei die Einstelleinrichtung auf das Auftreten des ersten Steuersignals (S_{err}) anspricht, um die Sendeleistung zu erhöhen, **dadurch gekennzeichnet, daß** weiter eine zweite Einrichtung (9) zum Anzeigen

der Schwankungs- bzw. Änderungsrate des Empfangssignalpegels und zum Erzeugen eines zweiten Steuersignals (S_{mp}) vorgesehen ist, wenn die Schwankungs- bzw. Änderungsrate einen vorbestimmten Schwellenwert überschreitet, und daß die Einrichtung (4) zum Einstellen der Sendeleistung auf das Auftreten des ersten (S_{en}) oder des zweiten (S_{mp}) Steuersignals durch zeitweises Anheben der Sendeleistung auf einen ersten Wert zwischen einer normalen Sendeleistung und der maximalen Sendeleistung anspricht.

9. System nach Anspruch 8, dadurch gekennzeichnet, daß die Einrichtung (4) zum Einstellen der Sendeleistung auf das gleichzeitige Auftreten des ersten (S_{en}) oder des zweiten (S_{mp}) Steuersignals zum Anheben der Sendeleistung auf eine maximale Sendeleistung anspricht.

10. System nach Anspruch 8 oder 9, dadurch gekennzeichnet, daß weiterhin auf der Empfangsseite eine dritte Einrichtung (10) zum Anzeigen des Empfangssignalpegels und zum Erzeugen eines dritten Steuersignals (S_{min}) vorgesehen ist, wenn der Empfangssignalpegel unter einem vorbestimmten Schwellenwert liegt, und daß die Einrichtung (4) zum Einstellen der Sendeleistung während des Ausbleibens des ersten (S_{en}) und des zweiten (S_{mp}) Steuersignals auf das Auftreten des dritten Steuersignals (S_{min}) durch Anheben der Sendeleistung um eine kleine Schrittweite anspricht.

11. System nach Anspruch 10, dadurch gekennzeichnet, daß die Einrichtung (4) zum Einstellen der Sendeleistung auf das Ausbleiben des ersten, zweiten und dritten Steuersignals zum Herabsetzen der Sendeleistung um eine vorbestimmte Schrittweite anspricht.

Revendications

1. Procédé pour ajuster la puissance d'émission dans un système de liaison radio numérique muni d'un point d'émission et d'un point de réception, ce procédé comprenant les étapes suivantes :
- l'émission d'un signal numérique à partir d'un point d'émission du système de liaison, à une valeur de puissance d'émission inférieure à une valeur maximum de puissance d'émission,
 - la réception dudit signal numérique au point de réception du système de liaison, ledit signal reçu comportant parfois des erreurs et

des modifications de niveau de signal,

- la détection et la surveillance du niveau du signal reçu et l'estimation du taux d'erreur au point de réception,
- l'ajustement de la puissance d'émission au point d'émission en fonction du niveau du signal détecté et de l'estimation du taux d'erreur, caractérisé par les étapes supplémentaires de :
- surveillance du taux de modification du niveau du signal reçu,
- augmentation temporaire de la puissance d'émission au point d'émission à une première valeur située entre la valeur de la puissance normale d'émission et la valeur maximum de la puissance d'émission lorsque soit l'estimation du taux d'erreur, soit le taux de modification du niveau du signal reçu dépassent une valeur de seuil prédéterminée respective.

2. Procédé selon la revendication 1, caractérisé en ce que la puissance d'émission est temporairement augmentée à la puissance de transmission maximum si l'estimation du taux d'erreur et le taux de modification du niveau du signal dépassent tous les deux la valeur de seuil prédéterminée respective.
3. Procédé selon la revendication 1 ou 2, caractérisé en ce que la puissance d'émission est ramenée de la première valeur vers la valeur normale après une période de temps prédéterminée faisant suite à la dernière détection d'un taux d'erreur estimé ou d'un certain taux de modification du niveau du signal reçu dépassant la valeur de seuil prédéterminée respective.
4. Procédé selon la revendication 3, caractérisé en ce que la puissance d'émission est ramenée à la valeur normale soit par étapes arbitraires, soit en continu.

5. Procédé selon l'une quelconque des revendications précédentes, caractérisé en ce que la puissance d'émission est augmentée d'une valeur prédéterminée lorsque le taux de modification du niveau du signal reçu et l'estimation du taux d'erreur ne dépassent pas les valeurs de seuil prédéterminées respectives, et que le niveau du signal reçu est situé en dessous d'une valeur de seuil prédéterminée.
6. Procédé selon l'une des revendications précédentes, caractérisé en ce que la puissance d'émission est diminuée d'une valeur déterminée si l'estimation

du taux d'erreur et le taux de modification du niveau du signal ne dépassent pas la valeur de seuil prédéterminée respective et si le niveau du signal reçu n'est pas en dessous d'une valeur de seuil prédéterminée.

7. Procédé selon l'une quelconque des revendications précédentes, caractérisé en ce que le taux de modification du niveau du signal reçu est contrôlé en comparant chaque niveau de signal donné à une moyenne à court terme de niveaux de signaux reçus ou avec le niveau mesuré d'un ou de plusieurs signaux précédents choisis arbitrairement. 5 10
8. Système de liaison radio numérique, comprenant, au point de réception (2), un premier moyen (11) pour surveiller l'estimation du taux d'erreur et pour engendrer un premier signal de commande (S_{err}) si l'estimation du taux d'erreur dépasse une valeur de seuil prédéterminée, et, à un point d'émission (1), des moyens (4) pour ajuster la puissance d'émission, lesdits moyens d'ajustement réagissant à l'apparition du premier signal de commande (S_{err}) en augmentant la puissance d'émission, 15 20 25 caractérisé en ce qu'il est en outre prévu un deuxième moyen (9) pour surveiller le taux de modification du niveau du signal reçu et pour engendrer un deuxième signal de commande (S_{mp}) si le taux de modification dépasse une valeur de seuil prédéterminée, et en ce que lesdits moyens (4) d'ajustement de la puissance d'émission réagissent à l'apparition du premier (S_{err}) ou du deuxième (S_{mp}) signal de commande en augmentant temporairement la puissance d'émission à une première valeur située entre la puissance d'émission normale et la puissance d'émission maximum. 30 35 40
9. Système selon la revendication 8, caractérisé en ce que lesdits moyens (4) d'ajustement de la puissance d'émission réagissent à l'apparition simultanée du premier (S_{err}) et du deuxième (S_{mp}) signal de commande en augmentant la puissance d'émission à la puissance d'émission maximum. 45
10. Système selon la revendication 8 ou 9, caractérisé en ce qu'au point d'émission, il est prévu un troisième moyen (10) pour surveiller le niveau du signal reçu et pour engendrer un troisième signal de commande (S_{min}) si le niveau du signal reçu se situe en dessous d'une valeur de seuil prédéterminée, et que lesdits moyens (4) d'ajustement de la puissance d'émission réagissent, en l'absence du premier (S_{err}) et du deuxième (S_{mp}) signal de commande, à l'apparition d'un 50 55

troisième signal (S_{min}) en augmentant la puissance d'émission d'une faible valeur.

11. Système selon la revendication 10, caractérisé en ce que lesdits moyens (4) d'ajustement de la puissance d'émission réagissent à l'absence des premier, deuxième et troisième signaux en diminuant la puissance d'émission d'une valeur prédéterminée.

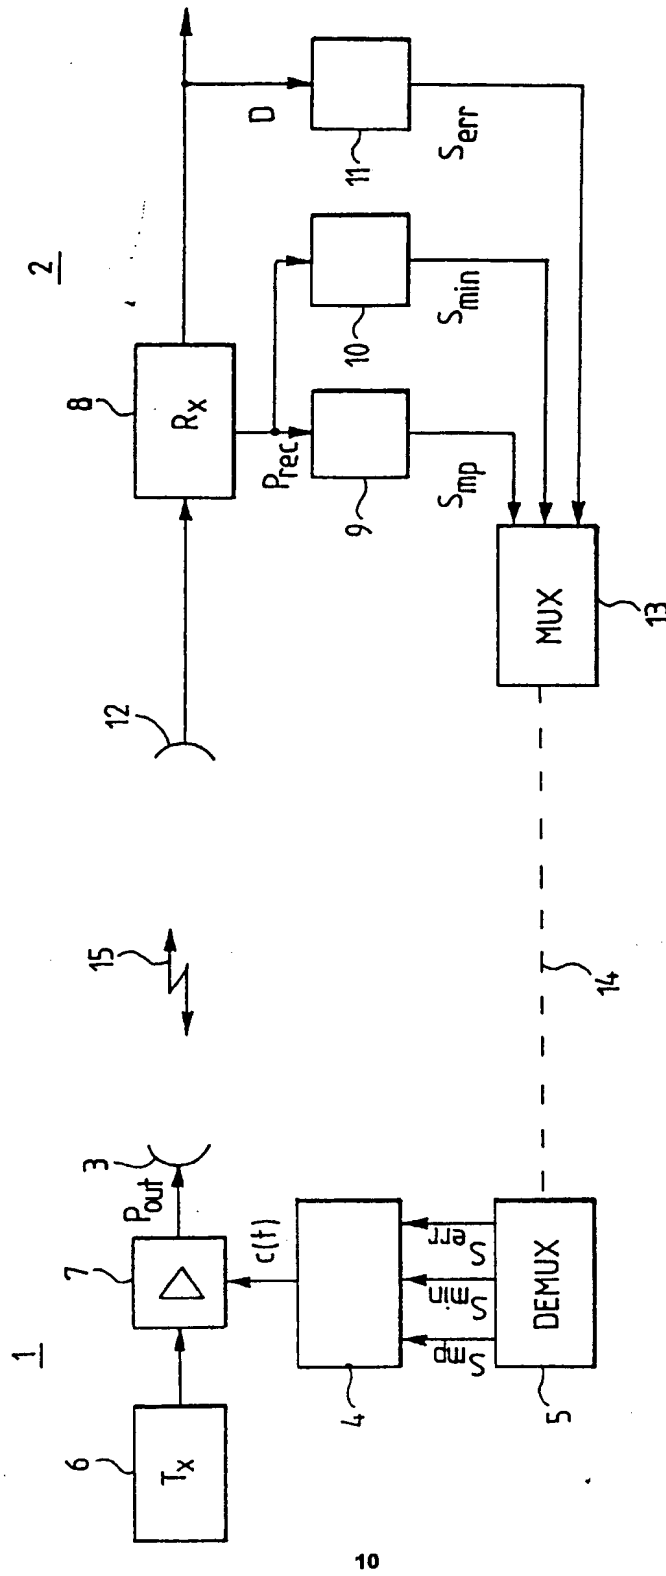


FIG. 1

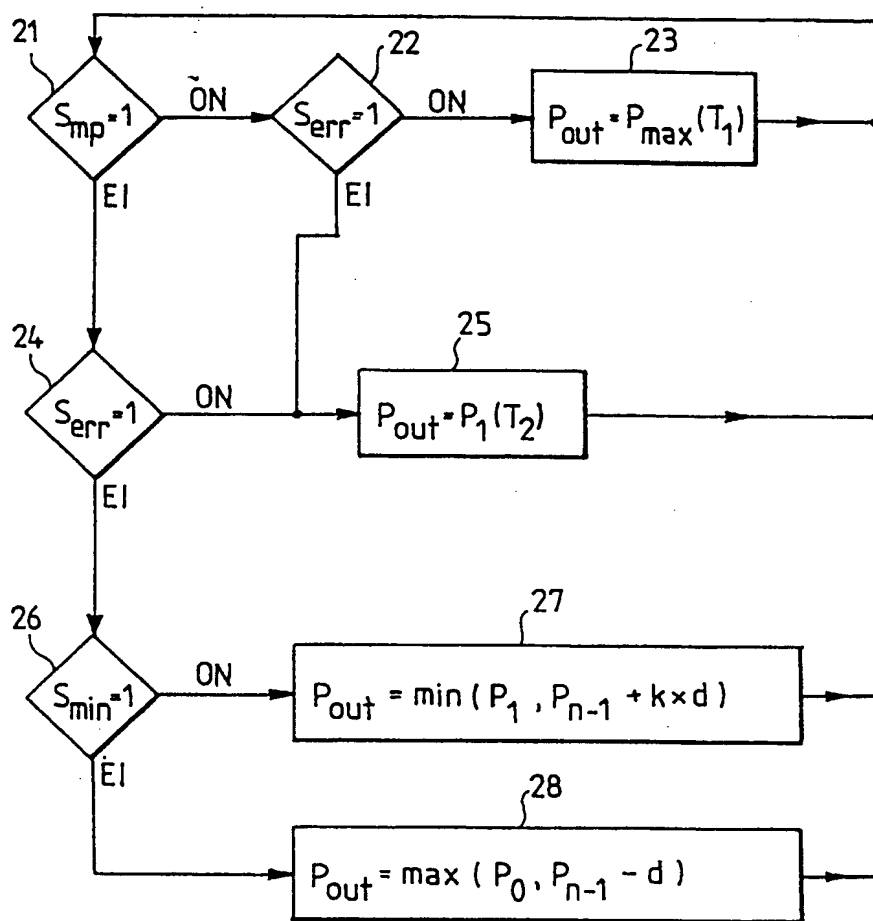


FIG. 2

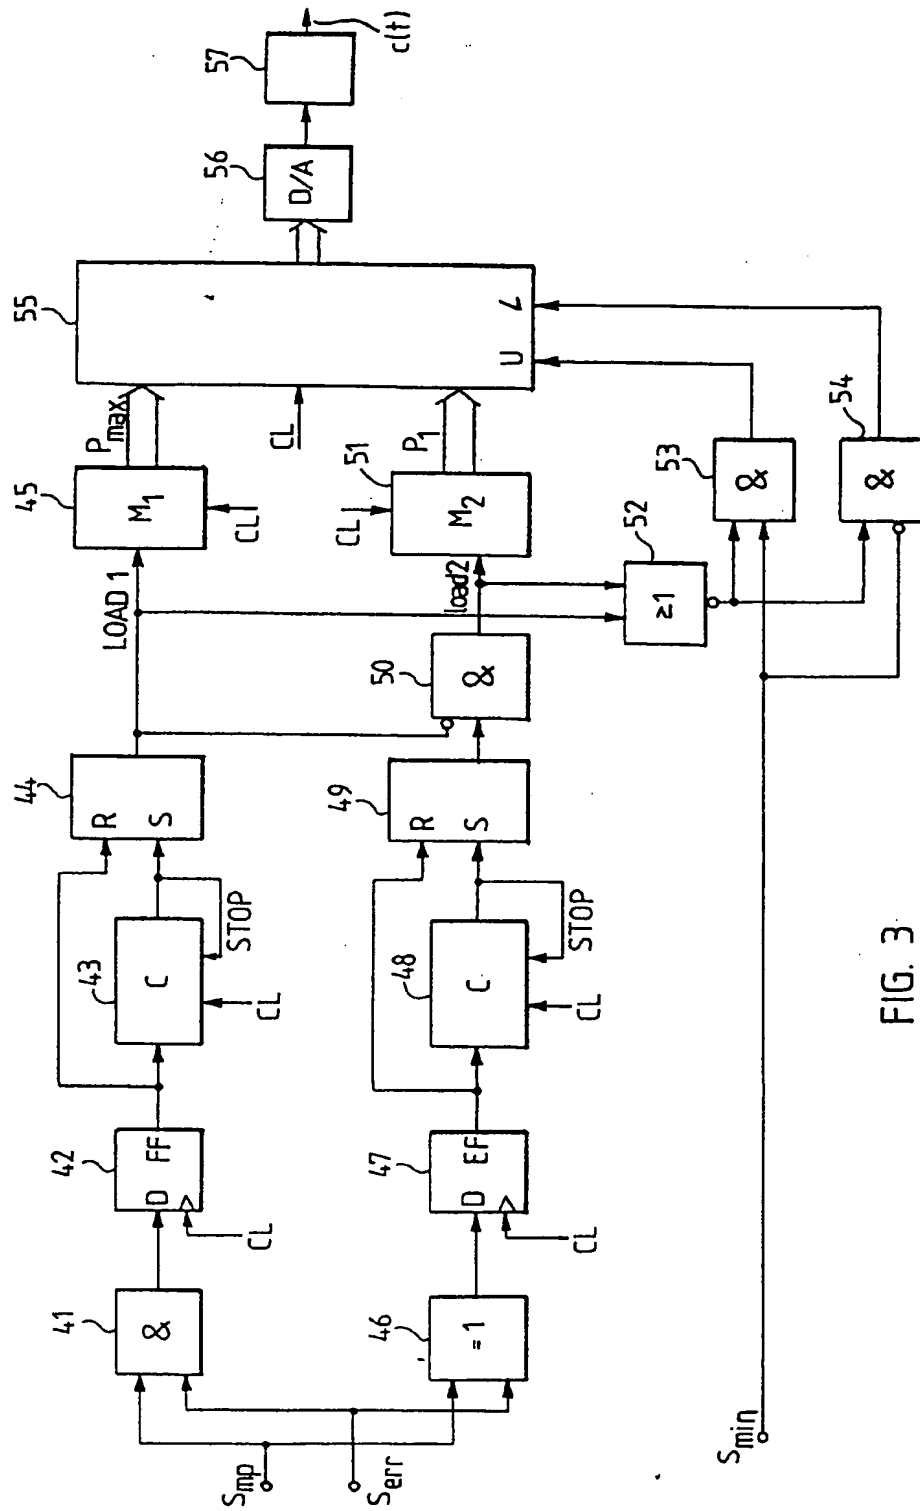


FIG. 3

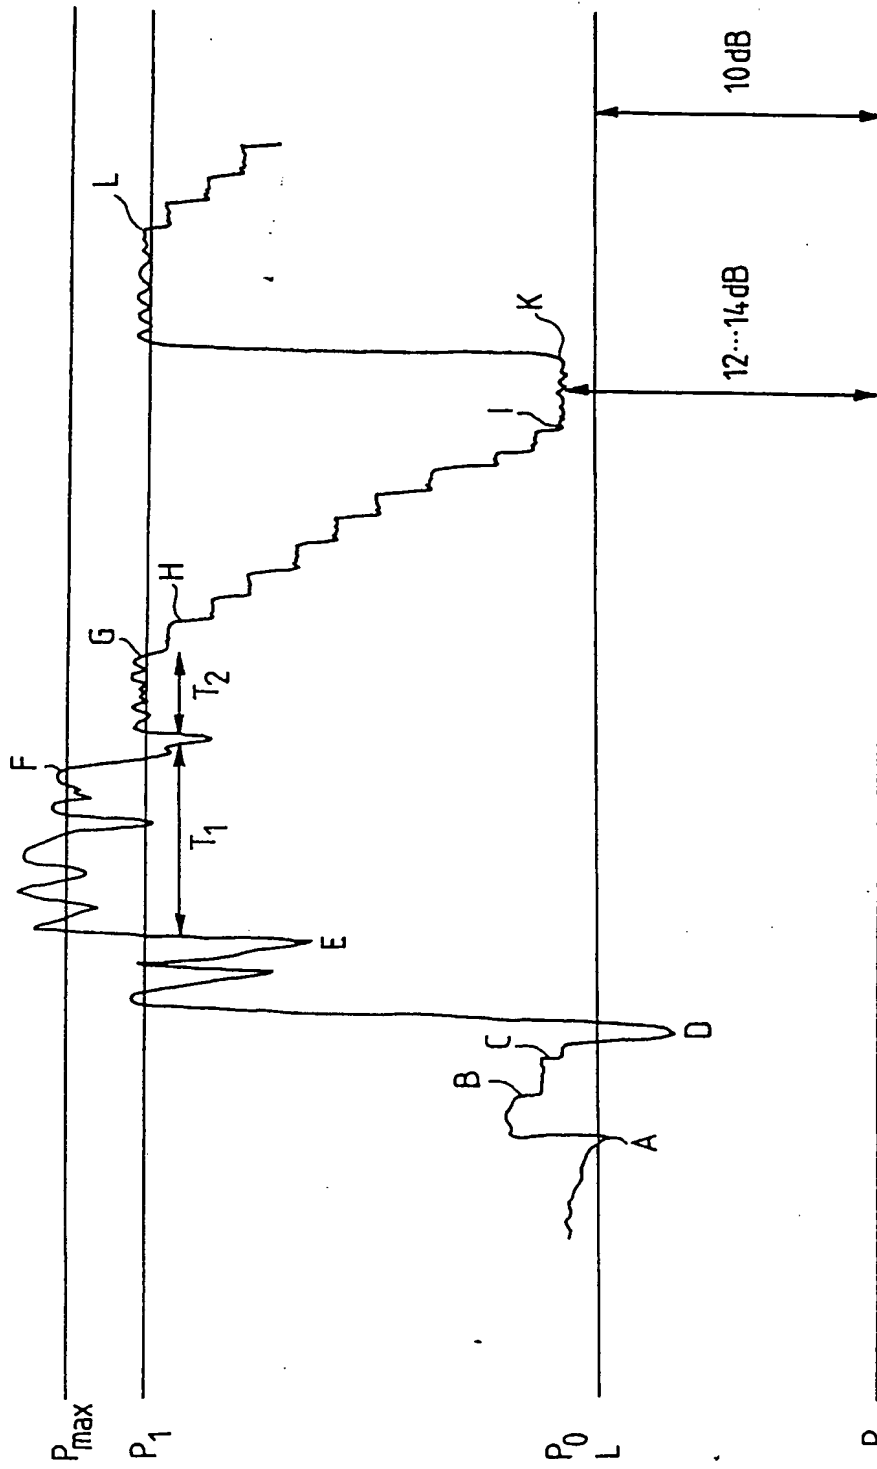


FIG. 4